

# EASY RACERS INC

200 Airport Blvd Freedom CA 95019-2614  
 www.easyracers.com  
 831-768-9468  
 Fax 831-768-9623

ROAD & RACE PROVEN  
 RECUMBENTS



Loveback and Loving It

## REAR FENDER MOUNTING FOR GOLD RUSH BIKES WITH EXSISTING BIKE RACKS

(A)

IF THERE ISN'T ONE ALREADY, DRILL ONE HOLE INTO THE FLAT METAL PLATE JUST BEHIND THE SEAT, USING A 7/32 DRILL BIT. YOU MAY HAVE TO MOVE THE SEAT. SUGGEST THAT YOU FIRST HOLD THE FRONT OF THE FENDER (WITH THE CLAMP ON IT) ONTO THE PLATE, AND MARK WHERE TO DRILL THE HOLE.

(B)

DRILL HOLES (ONE FOR EACH SIDE OF THE RACK) JUST BELOW WHERE THE TWO RACK RODS JOIN TOGETHER, USING A 7/32 DRILL BIT. DRILL THE HOLES ABOUT 1/2" TO 3/4" DOWN FROM WHERE THE RODS ACTUALLY JOIN.



(C)



RUN FENDER RODS THROUGH HOLES IN BOLTS (ONE ATTACHED TO EACH SIDE OF FENDER) AND TIGHTEN NUTS JUST ENOUGH TO HOLD THE RODS IN PLACE. YOU MAY NEED TO ADJUST THEM WHILE YOU DEAL WITH STEP (D).

(F)

ATTACH FRONT OF FENDER TO THE PLATE BEHIND THE SEAT. NOTE: THE FENDER CLAMP IS ADJUSTABLE AND CAN BE MOVED UP OR DOWN.

(D)

SECURE THE "HOOKED" END OF THE FENDER RODS TO THE PLACE WHERE YOU DRILLED THE HOLES (IN STEP (B)) AND TIGHTEN.

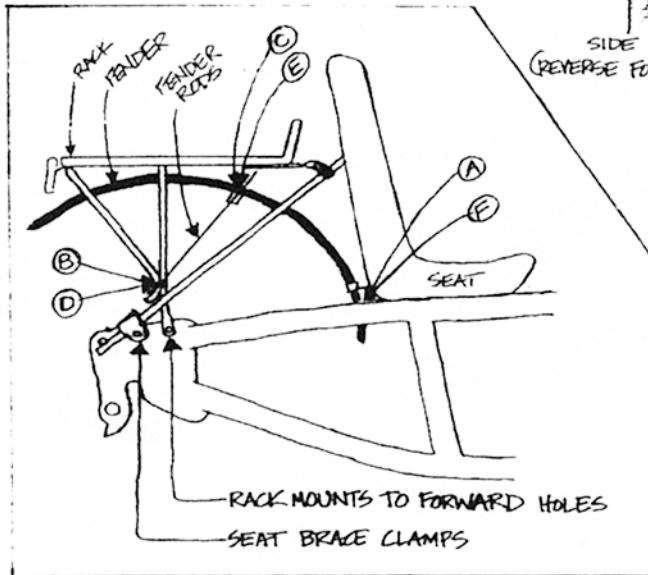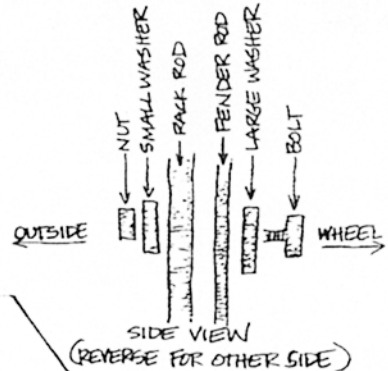

(E)

MAKE NECESSARY ADJUSTMENTS TO FENDER RODS (SEE STEP (C)) AND FIRMLY TIGHTEN HARDWARE.

